

Specifications

| Model | GS-3384 RT | |
|--|----------------|---------|
| Measurements | US | Metric |
| Working height maximum* | 39 ft | 12.06 m |
| A Platform height maximum | 33 ft | 10.06 m |
| B Platform height - stowed** | 5 ft 1 in | 1.55 m |
| C Platform length: | | |
| outside, extended - single deck | 13 ft .5 in | 3.98 m |
| outside, extended - dual deck | 17 ft 6.25 in | 5.34 m |
| D Slide-out platform extension deck - front | 5 ft | 1.52 m |
| E Slide-out platform extension deck - rear | 4 ft | 1.22 m |
| F Platform width - outside | 6 ft | 1.83 m |
| G Height - stowed: folding guardrails | 8 ft 9.5 in | 2.68 m |
| rails lowered | 6 ft 6.75 in | 2.0 m |
| H Length - stowed: single deck | 12 ft 11.25 in | 3.94 m |
| dual deck | 13 ft 0.5 in | 3.98 m |
| with outriggers | 16 ft | 4.88 m |
| I Width: standard tires | 7 ft | 2.13 m |
| high flotation tires | 7 ft 11 in | 2.41 m |
| A Wheelbase | 9 ft 4 in | 2.84 m |
| k Ground clearance - center | 13 in | .33 m |

Productivity

| | | |
|---|--------------|------------|
| Maximum platform occupancy | 7 | 7 |
| Lift capacity | 2,500 lbs | 1,134 kg |
| Lift capacity - extension deck | 500 lbs | 227 kg |
| Drive height | full height | |
| Drive speed - stowed | 4.0 mph | 6.4 km/h |
| Drive speed - raised | 0.7 mph | 1.1 km/h |
| Gradeability - stowed*** | 50% | |
| Maximum outrigger leveling: front to back | 7° | |
| side to side | 12° | |
| Turning radius - inside | 10 ft 1.5 in | 3.09 m |
| Turning radius - outside | 19 ft 6 in | 5.94 m |
| Raise/lower speed | 45/29 sec | |
| Controls | proportional | |
| Drive | four wheel | |
| Tires - foam-filled rough terrain | 10 x 31 in | 25 x 79 cm |

Power

| | | |
|---------------------------|---|---------|
| Power source | Ford MSG-425 4 cylinder gas/LPG 75 hp (56 kW) | |
| | Deutz D2011L03i 3 cylinder diesel 49 hp (36 kW) air cooled | |
| Auxiliary Power unit | 12 V DC | |
| Fuel tank capacity | 30 gal | 113.6 L |
| Hydraulic system capacity | 30 gal | 113.6 L |

Weight****

| | | |
|-----------------|------------|----------|
| | 11,825 lbs | 5,364 kg |
| with outriggers | 13,500 lbs | 6,124 kg |

Standards Compliance

ANSI A92.6, CSA B354.2, CE Compliance, AS 1418.10

* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

** Based on RT tires. Deduct 2 in (5.8 cm) for turf and non-marking.

*** Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.

**** Weight will vary depending on options and/or country standards.

Features

Standard Features

Measurements

- 39 ft (12.06 m) working height
- Up to 2,500 lbs (1,134 kg) lift capacity

Productivity

- 156.5 x 72 in (3.98 x 1.83 m) steel frame platform
- 60 in (1.52 m) extension deck
- Replaceable aluminum diamond plate deck
- Drive at full height
- Folding guardrails
- Proportional lift and drive
- Onboard diagnostic system
- AC power to platform
- Full height swing gate
- Two self-closing gates
- 4WD
- Positive traction control
- Four-wheel braking
- Slide-out engine tray
- Foam-filled rough terrain tires (eco fill)
- Tilt level sensor with audible alarm
- Descent alarm
- Horn
- Hour meter

Power

- 48 hp (36 kW) Deutz D2.9L4 diesel, Tier 4f


Options & Accessories

Productivity Options

- Dual slide-out platform extension deck package 5 ft (1.52 m) front and 4 ft (1.22 m) rear
- Automatic leveling hydraulic outriggers
- Air line to platform
- Foam filled non-marking rough terrain tires 10 x 31 in (25 x 79 cm)
- High flotation air-filled tires 17 x 33 in (43 x 84 cm)
- High flotation foam-filled tires 16 x 33 in (41 x 84 cm)
- Dual flashing beacons
- Motion alarm
- Biodegradable hydraulic oil

Power Options

- 75 hp (56 kW) Ford MSG 425 gas/LPG
- AC, 2000 Watt generator (120 V / 60 Hz), (includes hydraulic oil cooler)
- Cold weather package
- Hydraulic oil cooler
- Diesel catalytic scrubber muffler
- LPG steel tank only, 33.5 lb capacity

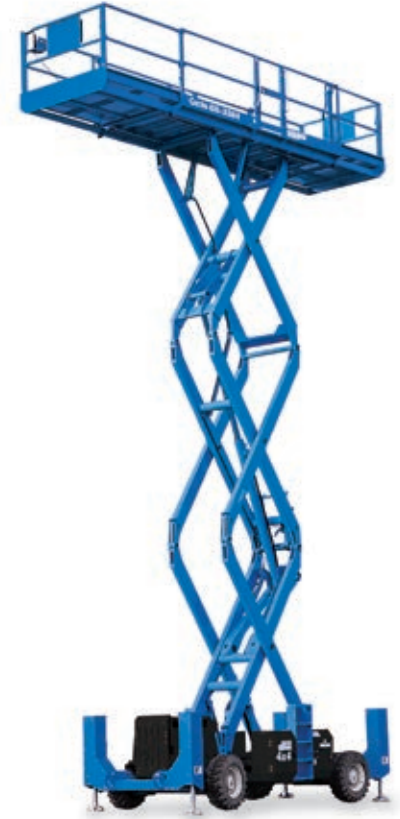

Genie United States

6464 185th Ave. NE
Redmond, WA 98052
Telephone +1 (425) 881-1800
Toll Free in USA/Canada +1 (800)-536-1800
Fax +1 (425) 883-3475

Distributed By:

Effective Date: January, 2016. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade names of Terex Corporation and/or their subsidiaries in the USA and many other countries. Terex, Genie and AWP are registered trademarks of Terex Corporation or its subsidiaries. © 2016 Terex Corporation.