

## COMPACT 10/12 RTE



- Adapted for rough terrain conditions or inside use
- 2 wheel drive
- 3.7 x 1.54m (12ft 2in x 5ft 1in) with extension deck extended
- Maximum load capacity of 565kg (1 245lb)



# COMPACT 10/12 RTE

# Electric scissor lifts

## The Haulotte® advantages



- Fully proportional controls
- Electric scissor lift with a 10 in (25cm) ground clearance allowing exceptional all-terrain performance
- Tight turning radius provides for excellent manoeuvrability in confined spaces
- Increased workspace area
- Robust, reliable and easy to maintain
- Improved safety due to inclusion of load limiter at the platform

## STANDARD FEATURES

- 2 rear drive wheels and 2 front steer wheels
- 3° tilt alarm
- 2 drive speeds
- One 1.2m (47in) manual slide out extension deck
- Load limiter at the platform with alarm
- Removable control box
- Free wheeling device
- Hourmeter
- Horn
- Side protections
- Towing hooks and lifting eyes
- Safety hooks for harness
- 4 hydraulic brakes
- Emergency lowering system
- Foam filled rough terrain tyres
- Proportional drive control

## OPTIONS & ACCESSORIES

- Flashing light
- Work light
- Motion alarm
- Mains electric power outlet at platform
- Biodegradable oil for warm or cold temperature
- Hot countries kit
- Cold countries kit
- Non-marking tyres
- Fold down handrails handrails
- On-board generator 800W
- Traction batteries
- Overload device

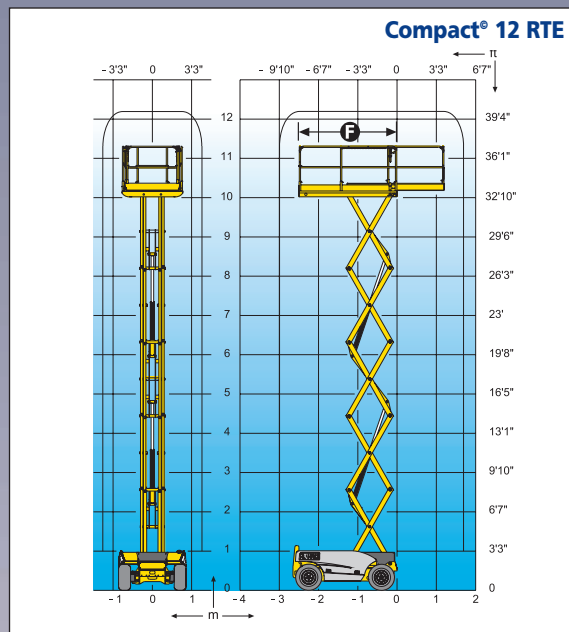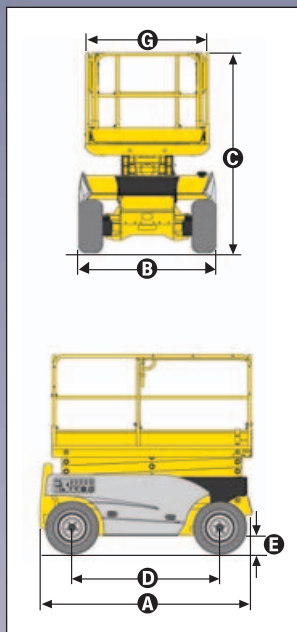

## SPECIFICATIONS

	Compact 10 RTE		Compact 12 RTE	
Working height	10.2 m	39ft 5in	12.14 m	39ft 10in
Platform height	8.2 m	26ft 10in	10.14 m	33ft 3in
Maximum capacity	565 kg	1245lb	450 kg	992lb
<b>A</b> Length	2.65 m	8ft 8in	2.65 m	8ft 8in
<b>B</b> Width	1.80 m	5ft11in	1.80 m	5ft11in
<b>C</b> Height (guardrails)	2.37 m	7ft 10in	2.54 m	8ft 4in
Height (platform)	1.3 m	4ft 11in	1.4 m	5ft 7in
<b>D</b> Wheelbase	1.87 m	6ft 2in	1.87 m	6ft 2in
<b>E</b> Ground clearance	25 cm	10in	25 cm	10in
<b>F</b> x <b>G</b> Platform size	2.5 x 1.54 m	8ft2in x 5ft 1in	2.5 x 1.54 m	8ft2in x 5ft 1in
Platform extension	1.2 m	47in	1.2 m	47in
Capacity on extension	150 kg	331lb	150 kg	331lb
Drive speed	1 / 5.8 km/h	0.62 / 3.6 mph	1 / 5.8 km/h	0.62 / 3.6 mph
Outside turning radius	3.78 m	12ft 5in	3.78 m	12ft 5in
Raise / lower speed (sec.)	35 / 35			
Engine	11,5kw / 48v			
Maximum gradeability	25 %			
Brakes	Hydraulic			
Foam filled tyres	26 x 12 - 12			
Hydraulic tank	45 l			
Semi-traction batteries	48V - 8x6V - 285AH			
Charger	45 A			
Weight	3380 kg	7 452lb	3720 kg	8201lb

AS 1418.10



HAULOTTE UK LTD • STAFFORD PARK 6 • TELFORD - SHROPSHIRE TF3 3AT • TEL: +44 (0)1952 292753 • FAX: +44 (0)1952 292758 • E-mail: haulotte@haulotte.co.uk  
 HAULOTTE SCANDINAVIA AB • ARÖDS INDUSTRIVÄG 66 B • 422 43 HISINGS BACKA - SWEDEN • TEL: +46 31 744 32 90 • FAX: +46 31 744 32 99 • E-mail: hwallin@haulotte.se • www.haulotte.se  
 HAULOTTE AUSTRALIA PTY LTD • 65 LICOLA CRES • DANDENONG - VIC - 3175 • TEL: +61 (0)3 9706 6787 • FAX: +61 (0)3 9706 6797 • E-mail: sales@haulotte.com.au  
 HAULOTTE SINGAPORE PTE. LTD • 26 Changi North Road Way • SINGAPORE 498812 • TEL: +65 6536 3989 • FAX: +65 6536 3969 • E-mail: haulotteasia@haulotte.com

**Haulotte**   
GROUP